2 kgs kgs m/m


in the



The company with an International reputation

- * THESE RUGGED POSITIONERS FEATURE AN ALL WELDED RIGID BODY
- * THE TABLE IS CARRIED ON LARGE DIAMETER GEARED SLEWING RING
- ★ TABLE 6'0" IN DIAMETER MACHINED ACCURATELY FLAT AND INDEXED
- * VARIABLE SPEED CONTROL BY PROVEN TROUBLE-FREE WARD-LEONARD SYSTEM
- ★ DIRECT DRIVE INTO GEARED SLEWING RING ELIMINATING BACKLASH

POSITIONER B.6.

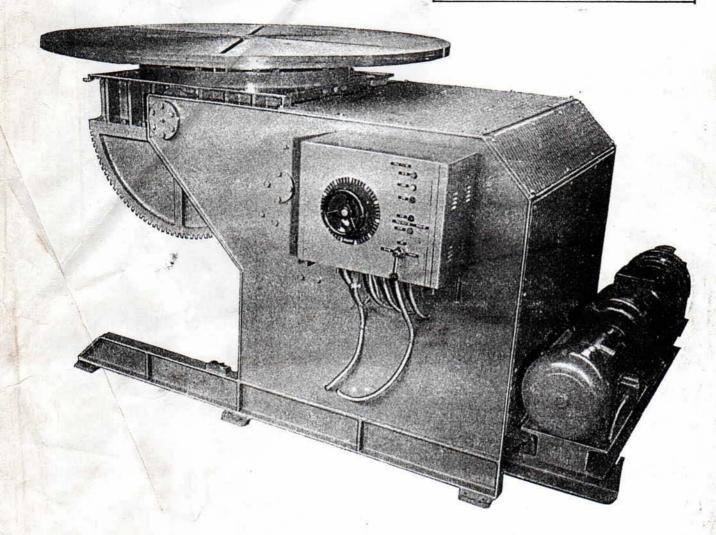

The Company reserve the right to alter the design of its products without notice, when such alterations are considered as being in the interest of the customer.

Macobe Engine

CASTLEMAINE AVENUE · GILLINGHAM · KENT