

Kjellberg
FINSTERWALDE

the
FINE FOCUS
company

With
HiFOCUS PLUS
Technology

Plasma Cutting Unit

HiFocus 80i

**Sophisticated Plasma Technology
for cutting of material from 0.5 to 20 (25) mm
with oxygen-containing plasma gases**



Soft-Switch-Inverter - Made in Germany

HiFocus 80i - unit of function and design

The request of our customers for a plasma cutting unit with **HiFocus^{PLUS} technology** for materials from 0.5 to 20 (25) mm was the reason for our enterprise for a new development. Additionally the rising demand of the automobile industry and their suppliers calls for a future-orientated and up-to-date HiFocus unit, covering its technical capabilities, especially for the robot operation, and meeting all requirements on the local and international market.



Based on the approved Soft-Switch-Inverter technology now the **HiFocus 80i** with the micro-processor controlled power source is at disposal for a cutting range up to 80 A at 100 % duty cycle. In connection with the powerful **plasma torch PerCut 80** quality cutting in a wide range is granted. That means **laserlike quality cuts** with nearly no dross adherence, lowest straightness tolerances and very clean cutting surfaces.

The high performance capacity of the plasma torch PerCut 80 ensures in connection with the heavy duty **XL-Life-Time system** and its longevity of cathodes and nozzles (up to 1,200 piercings with edge squareness still below 3°) **lowest costs on consumables** and **minimized downtimes**. The technical conditions for the high productivity of the plasma cutting process are optimized operational parts of the beam generation system interacting with microprocessor controlled sequences.



For the moment this unique plasma cutting unit with **HiFocus^{PLUS} technology** will be offered in this performance class for the plasma gases oxygen and air. Because of the outstanding price-performance ratio especially the medium sized industry now is in the position to compete on the market with high-class cutting work.

The flexible installation configuration will be offered as a complete package with hose parcel extensions up to 15 m, sufficient for thin sheet cutting with small 2-D guiding systems with approximately 2.5 x 4.0 m table size, and for robot applications as well.

For advanced robot applications the separate system specification **HiFocus 80i-Robo** is available. With newly developed 3-D consumables for **bevel cutting up to 45°** the unit particularly is recommended for bevelling units and robots, also in connection with particular torches.

Versatile torch technology - basis for quality and flexibility

To meet the enhanced requirements of the HiFocus technology the new PerCut torch generation was developed. Increased arc constriction due to smaller orifices, optimized gas rotation as well as the use of swirl gas are the main features of those torches. For the three-dimensional cutting separate 3-D consumables are used, covering the full range of application.

Special variations of the **plasma torches PerCut 80** and **PerCut 90** ensure cutting operations under different conditions. Especially for robot applications torches with 60° and 90° head inclination and strengthened shaft can be offered. Those are ideal prerequisites for 3-D cutting operations, typical also for the automobile industry.

The new plasma cutting unit is available on request with the plasma torch **PerCut 90**, furnished with a **quick-change head**, which ensures easy handling and reduces downtimes.

The advantages are:

- Quick technology conversion for changing cutting jobs
- Rapid power adaptation to different thicknesses of material
- Fast replacement of consumables with prepared torch heads



Quick-change torch PerCut 90

High productivity by HiFocus technology

Operational range of the HiFocus 80i	Mild steel thickness (mm)	HiFocus technology		HiFocus ^{PLUS} technology		
		Cutting current (A)	Cutting speed (mm/min)	Cutting current (A)	Cutting speed (mm/min)	
	0,5	20	5 000			
	1	20	3 500			
	2	50	2 600			
	3	50	2 200			
	4	50	950	50	2 800	
	5	50	800	50	2 400	
	6	50	750	80	2 400	
	8			80	2 000	
	10			80	1 800	
	12			80	1 400	
	15			80	1 000	
	Recomm. range for application	20			80	450
	Maximum cutting range	(25)			(80)	(200)

(State: 10/2004)

The cutting speed is valid for the **highest cut quality**. In case of reduced demands on the cut quality cutting with up to 2.5-fold speed is possible. The cutting speed depends on kind of material, gas pressure, cutting and swirl gas and the used nozzle/cathode system as well.

Technical data


	HiFocus 80i
Power source	Soft-Switch-Inverter
Cutting current	10 - 80 A (100 % d.c.)
Mains connection	3x 400 V, 50 Hz
Mains fuse	25 A "C"
Connecting load	17 kVA
Open circuit voltage	400 V
Ignition	High tension
Protection class	IP 22
Insulation class	F
Dimensions (L x B x H)	970 x 510 x 970 mm
Weight	161 kg

	Plasma Torch
Plasma machine torch	PerCut 80
Quick-change torch	PerCut 90
Cutting current (100% d.c.)	max. 100 A
Standard lengths	
Torch hose parcel	1.5 m
Cable set for PBA	6, 10, 15 m
Clamping diameter	
PerCut 80	44 mm
PerCut 90	50 mm
Weight (with 1,5 m hose parcel)	3.8 kg
Cooling	direct circulation
Plasma gases	Oxygen, Air
Swirl gases	Oxygen, Nitrogen, Air

Kjellberg-plasma cutting units are CE-conform and correspond with the valid guidelines and instructions of the European Union. They are developed and fabricated on basis of following standards and instructions: EN 60974-1 (VDE 0544, part 1) and BGV D1. The plasma cutting units are labelled with the S-sign and therefore applicable to environments with increased hazard of electric shock.

The fabrication takes place according to DIN EN ISO 9001. The factory-owned quality assurance comprises piece and cutting performance tests, documented by test certificate.

System configuration for the cutting of mild steel with robots or guiding systems

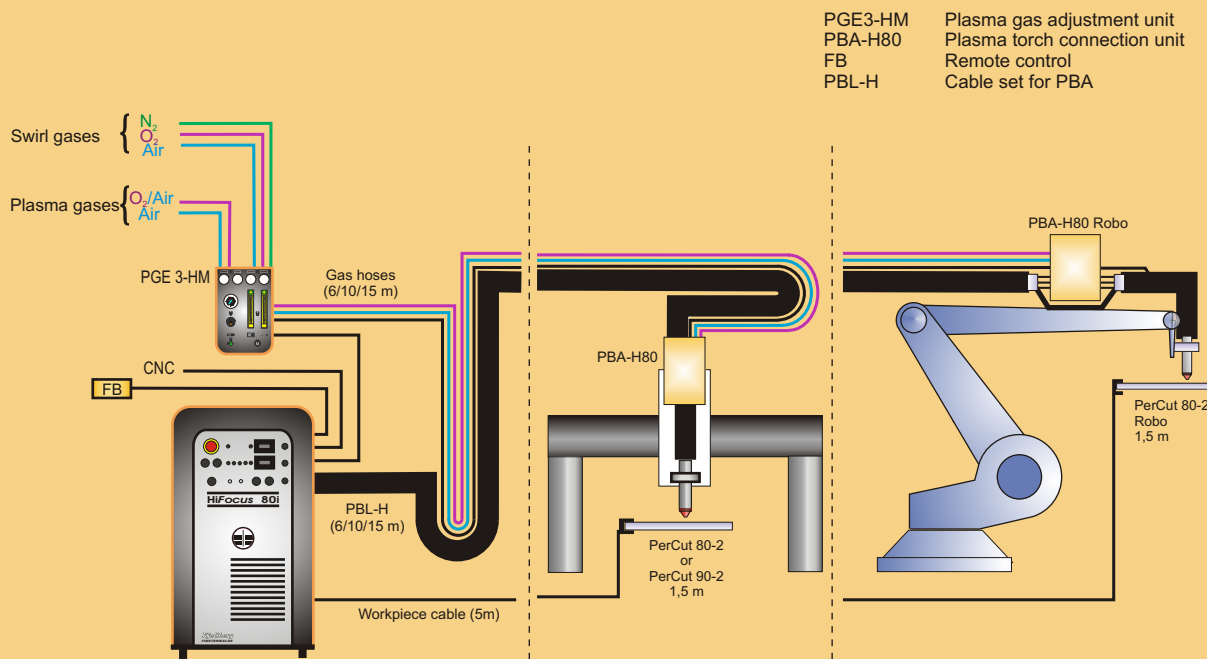

Our products represent a high level of quality and reliability. We reserve the rights to change design and/or technical specification during the series fabrication. Claims of whatever kind can't be derived from this prospectus.

04-10-03

Kjellberg

FINSTERWALDE

Kjellberg Finsterwalde Elektroden und Maschinen GmbH
 Germany D - 03238 Finsterwalde Leipziger Str. 82
 Tel.: +49 3531 500-0 Fax: +49 3531 500-227
 E-mail: kjellberg@kjellberg.de
 Internet: www.kjellberg.de

www.westermans.com
 welding@westermans.com